

## 天线 System

检测器一般由发射器和接收器两个部分组成。其基本原理是利用发射天线将一扫描带发射出去，在发射天线和接收器之间形成一个扫描区，而在其接收范围内利用接收天线将这频带接收还原，再利用电磁波的共振原理来搜寻特定范围内是否有有效标签存在，当该区域内出现有效标签即触发报警。

The detector consists of two parts, the transmitter and the receiver. The basic principle is to use a transmitting antenna to send a scanning band out and form a scanning area between the transmitting antenna and the receiver, and the receiving antenna is used to restore the band within its receiving range, and then the resonance principle of the electromagnetic wave is used to search for the existence of effective labels within a specific range, when the area is out of the region. The current effective label triggers the alarm.

# HL2800

简约设计 经典款式  
Simple Design Classic Style

# AM8089

经济节能 性能稳定  
Simple Design Classic Style


## ■ 技术参数 Technical parameters

材质:进口亚克力	Material:Imported acrylic
输入电压:100-240V AC, 50-60Hz	Input:100-240V AC, 50-60Hz
中心频率:58Khz	Center Frequency:58Khz
工作温度:0°C-55°C	Working temperature:0°C-55°C
相对湿度:0%-90%	Relative humidity:0%-90%
高度:155cm	Height:155cm
宽度:42cm	Width:42cm
厚度:14cm	Thickness:14cm
包装:1支/箱, 25kg/箱	Packing:1pcs/ctn, 25kg/ctn
1640*488*142mm/箱	1640*488*142mm/ctn

## ■ 产品特点 Product Features

- 1、时尚外观,采用高品质的亚克力材质,使商品风格更时髦和现代化;
- 2、工作电源220V和110V可转换。主机内置,即插即用,检测软硬标签具有稳定的性能;
- 3、两门之间硬标签的检测距离为1.4米-2米,软标签为1.1米-1.5米,准确距离根据标签种类和现场环境而定;
- 4、支持一主机拖两副机,可减少采购成本,使用软件调试。

- 1、Made of high-quality acrylic material with fashionable appearance, make store become more fashionable and modern.
- 2、Working power 220V and 110V can be converted, main engine is inbuilt, plug power and play the antenna. It has stable performance to detect soft label and hard tag.
- 3、The detect distance of hard tag is about 1.4m-2m between 2 antennas, soft label is 1.1m-1.4m, accurate distance should depend on type of label/tag and local environment.
- 4、Support one master and two slave working in same time, can reduce purchase cost, debugging by software.

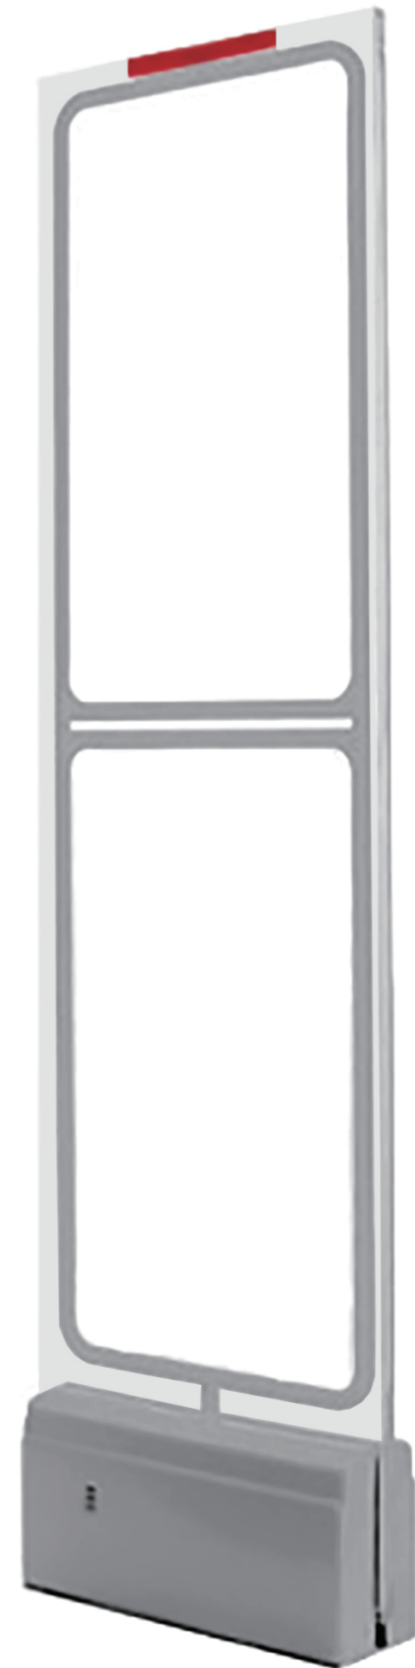


## ■ 技术参数 Technical parameters

材质:进口亚克力	Material:Imported acrylic
输入电压:100-240V AC, 50-60Hz	Input:100-240V AC, 50-60Hz
中心频率:58Khz	Center Frequency:58Khz
工作温度:0°C-55°C	Working temperature:0°C-55°C
相对湿度:0%-90%	Relative humidity:0%-90%
高度:153cm	Height:153cm
宽度:39cm	Width:39cm
厚度:14cm	Thickness:14cm
包装:1支/箱, 24kg/箱	Packing:1pcs/ctn, 24kg/ctn
1640*488*145mm/箱	1640*488*145mm/ctn

## ■ 产品特点 Product Features

- 1、时尚外观,采用高品质的亚克力材质,使商品风格更时髦和现代化;
- 2、工作电源220V和110V可转换。主机内置,即插即用,检测软硬标签具有稳定的性能;
- 3、两门之间硬标签的检测距离为1.4米-2米,软标签为1.1米-1.5米,准确距离根据标签种类和现场环境而定;
- 4、支持一主机拖两副机,可减少采购成本,使用软件调试。

- 1、Made of high-quality acrylic material with fashionable appearance, make store become more fashionable and modern.
- 2、Working power 220V and 110V can be converted, main engine is inbuilt, plug power and play the antenna. It has stable performance to detect soft label and hard tag.
- 3、The detect distance of hard tag is about 1.4m-2m between 2 antennas, soft label is 1.1m-1.4m, accurate distance should depend on type of label/tag and local environment.
- 4、Support one master and two slave working in same time, can reduce purchase cost, debugging by software.

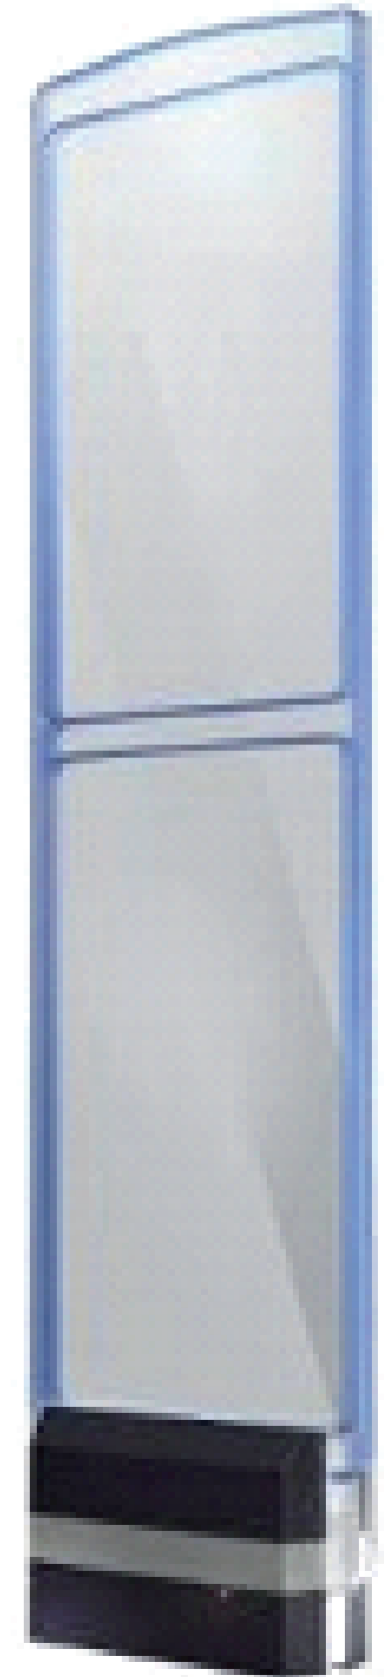

# S120

简约设计 经典款式  
Simple Design Classic Style

# HL2950

经济节能 性能稳定  
Simple Design Classic Style

## ■ 技术参数 Technical parameters

材质:ABS工程塑料	Material:ABS plastic+acrylic
输入电压:100-240V AC, 50-60Hz	Input:100-240V AC, 50-60Hz
中心频率:58Khz	Center Frequency:58Khz
工作温度:0°C-55°C	Working temperature:0°C-55°C
相对湿度:0%-90%	Relative humidity:0%-90%
高度:160cm	Height:160cm
宽度:42cm	Width:42cm
厚度:14cm	Thickness:14cm
包装:2支/箱, 17kg/箱	Packing:2pcs/ctn, 17kg/ctn
1690*550*150mm/箱	1690*550*150mm/ctn

## ■ 产品特点 Product Features

- 1、时尚外观,采用高品质的ABS工程塑料,有透明面板和炫绿色面板可选择,使商店风格更加时髦和现代化;
- 2、工作电源 220V 和 110V 可转换。主机内置,即插即用,检测软硬标签具有稳定的性能;
- 3、两门之间硬标签的检测距离为1.4米-2米,软标签为1.1米-1.5米,准确距离根据标签种类和现场环境而定;
- 4、支持一主机拖两副机,可减少采购成本,使用安卓APP调试。

- 1、Made of high-quality ABS plastic and acrylic material with fashionable appearance, transparent panels and green panels for choice, make store become more fashionable and modern.
- 2、Working power 220V and 110V can be converted, main engine is inbuilt, plug power and play the antenna. It has stable performance to detect soft label and hard tag.
- 3、The detect distance of hard tag is about 1.4m—2m between 2 antennas, soft label is 1.1m—1.4m, accurate distance should depend on type of label/tag and local environment.
- 4、Support one master and two slave working in same time, can reduce purchase cost, debugging by Android Apps.



## ■ 技术参数 Technical parameters

材质:ABS工程塑料	Material:ABS plastic
输入电压:100-240V AC, 50-60Hz	Input:100-240V AC, 50-60Hz
中心频率:58Khz	Center Frequency:58Khz
工作温度:0°C-55°C	Working temperature:0°C-55°C
相对湿度:0%-90%	Relative humidity:0%-90%
高度:167cm	Height:167cm
宽度:52cm	Width:52cm
厚度:20cm	Thickness:20cm
包装:2支/箱, 14kg/箱	Packing:2pcs/ctn,14kg/ctn
主机:7.5kg, 副机:6.5kg	host:7.5kg, Vice:6.5kg
1680*530*220mm/箱	1680*530*220/ctn

## ■ 产品特点 Product Features

- 1、时尚外观,采用高品质的ABS工程塑料,使商品风格更时髦和现代化;
- 2、工作电源220V和110V可转换。主机内置,即插即用,检测软硬标签具有稳定的性能;
- 3、两门之间硬标签的检测距离为1.4米-2米,软标签为1.1米-1.5米,准确距离根据标签种类和现场环境而定;
- 4、支持一主机拖两副机,可减少采购成本,使用软件调试。

- 1、Made of high-quality acrylic material with fashionable appearance, make store become more fashionable and modern.
- 2、Working power 220V and 110V can be converted, main engine is inbuilt, plug power and play the antenna. It has stable performance to detect soft label and hard tag.
- 3、The detect distance of hard tag is about 1.4m-2m between 2 antennas, soft label is 1.1m-1.4m, accurate distance should depend on type of label/tag and local environment.
- 4、Support one master and two slave working in same time, can reduce purchase cost, debugging by software.



# S130

时尚经典造型 别致线条设计  
Fashion Classic Style Chic Line Design

# S180

时尚经典造型 别致线条设计  
Fashion Classic Style Chic Line Design

## ■ 技术参数 Technical parameters

材质:ABS工程塑料	Material:ABS plastic
输入电压:100-240V AC,50-60Hz	Input:100-240V AC,50-60Hz
中心频率:58Khz	Center Frequency:58Khz
工作温度:0°C-55°C	Working temperature:0°C-55°C
相对湿度:0%-90%	Relative humidity:0%-90%
高度:162cm	Height:162cm
宽度:46cm	Width:46cm
厚度:13cm	Thickness:13cm
包装: 2支/箱, 17kg/箱 1690*550*240mm/箱	Packing: 2pcs/ctn, 17kg/ctn 1690*550*240mm/ctn

## ■ 产品特点 Product Features

- 1、时尚外观,采用高品质的塑料材质,使商品风格更时髦和现代化方;
  - 2、工作电源220V和110V可转换。主机内置,即插即用,检测软硬标签具有稳定的性能;
  - 3、两门之间硬标签的检测距离为1.4米-1.8米,软标签为1.1米-1.4米,准确距离根据标签种类和现场环境而定;
  - 4、支持一主机拖两副机,可减少采购成本,使用遥控器调试。
- 1、Made of high-quality ABS plastic material with fashionable appearance, make store become more fashionable and modern.
  - 2、Working power 220V and 110V can be converted, main engine is inbuilt, plug power and play the antenna. It has stable performance to detect soft label and hard tag.
  - 3、The detect distance of hard tag is about 1.4m-1.8m between 2 antennas, soft label is 1.1m-1.4m, accurate distance should depend on type of label/tag and local environment.
  - 4、Support one master and two slave working in same time, can reduce purchase cost, debugging by remote control.



## ■ 技术参数 Technical parameters

材质:进口亚克力	Material:Acrylic
输入电压:100-240V AC, 50-60Hz	Input:100-240V AC, 50-60Hz
中心频率:58Khz	Center Frequency:58Khz
工作温度:0°C-55°C	Working temperature:0°C-55°C
相对湿度:0%-90%	Relative humidity:0%-90%
高度:159cm	Height:159cm
宽度:41cm	Width:41cm
厚度:12cm	Thickness:12cm
包装: 1支/箱 主机: 27Kg, 副机: 25Kg 1680*530*250mm/箱	Packing: 1pcs/ctn host: 27kg, Vice: 25kg 1680*530*250/ctn

## ■ 产品特点 Product Features

- 1、时尚外观,采用高品质的亚克力材质,使商店风格更加时髦和现代化;
  - 2、工作电源220V和110V可转换。主机内置,即插即用,检测软硬标签具有稳定的性能;
  - 3、两门之间硬标签的检测距离为1.4米-1.8米,软标签为1.1米-1.4米,准确距离根据标签种类和现场环境而定;
  - 4、支持一主机拖两副机,可减少采购成本,使用遥控器调试。
- 1、Made of high-quality acrylic material with fashionable appearance, make store become more fashionable and modern.
  - 2、Working power 220V and 110V can be converted, main engine is inbuilt, plug power and play the antenna. It has stable performance to detect soft label and hard tag.
  - 3、The detect distance of hard tag is about 1.4m-1.8m between 2 antennas, soft label is 1.1m-1.4m, accurate distance should depend on type of label/tag and local environment.
  - 4、Support one master and two slave working in same time, can reduce purchase cost, debugging by remote control.



# HL360

时尚简约的款式  
Fashion and Simple Style

# 6720

美观的外型  
Beautiful appearance

## ■ 技术参数 Technical parameters

材质: 铝合金	Material: Aluminium alloy
主板: 3820模拟信号板 4900数字处理板	Mainboard: 3820 Analog signal board 4900 DSP board
输入电压: 100-240V AC, 50-60Hz	Input: 100-240V AC, 50-60Hz
中心频率: 8.2Mhz	Center Frequency: 8.2Mhz
工作温度: 0°C-55°C	Working temperature: 0°C-55°C
相对湿度: 0%-90%	Relative humidity: 0%-90%
高度: 157cm	Height: 157cm
宽度: 37cm	Width: 37cm
厚度: 10cm	Thickness: 10cm
包装: 2支/箱, 12.2kg/箱 1620*410*200mm/箱	Packing: 2pcs/ctn, 12.2kg/ctn 1620*410*200mm/ctn

## ■ 产品特点 Product Features

- 1、采用高品质的铝合金材料, 配备白色架子, 经典外观;
  - 2、发射控制开关选择, 当某一信号出现强干扰时, 可以选择关闭该路发射, 以减少误报现象;
  - 3、标配3820模拟信号主板, 可选择搭配数字处理主板;
  - 4、一发一收模式: 软标签检测距离为60cm-90cm, 硬标签为100-160cm, 根据标签种类和现场环境而定。
1. Made of high-quality aluminum alloy material, white shell for classic appearance.
  2. Transmit control switch selection, when some road signal appears strong interference, you can choose to turn off the road launch, to reduce false positives.
  3. Normally pair with 3820 Analog signal mainboard, can be optional with digital processing mainboard.
  4. One receiver and one transmitter: detect distance of soft label is 60cm-90cm, hard tag is 100cm-160cm, accurate distance should depend on type of label/tag and local environment.



## ■ 技术参数 Technical parameters

材质: 铝合金	Material: Aluminium alloy
主板: 收发一体主板	Mainboard: MONO
输入电压: 100-240V AC, 50-60Hz	Input: 100-240V AC, 50-60Hz
中心频率: 8.2Khz	Center Frequency: 8.2Khz
工作温度: 0°C-55°C	Working temperature: 0°C-55°C
相对湿度: 0%-90%	Relative humidity: 0%-90%
高度: 166cm	Height: 166cm
宽度: 42cm	Width: 42cm
厚度: 10cm	Thickness: 10cm
包装: 2支/箱, 19kg/箱 1710*500*195mm/箱	Packing: 2pcs/ctn, 19kg/ctn 1710*500*195mm/ctn

## ■ 产品特点 Product Features

- 1、采用高品质的铝合金材质, 外观经典大方;
  - 2、发射控制开关选择, 当某一信号出现强干扰时, 可以选择关闭该路发射, 以减少误报现象;
  - 3、标配3820模拟信号主板, 可选择搭配数字处理主板;
  - 4、一发一收模式: 软标签检测距离为60cm-90cm, 硬标签为100-160cm, 准确距离根据标签种类和现场环境而定。
1. Made of high-quality aluminum alloy material with classic appearance.
  2. Transmit control switch selection, when some road signal appears strong interference, you can choose to turn off the road launch, to reduce false positive
  3. Normally pair with 3820 Analog signal mainboard, can be optional with digital processing mainboard.
  4. One receiver and one transmitter: detect distance of soft label is 60cm-90cm, hard tag is 100cm-160cm, accurate distance should depend on type of label/tag and local environment.



# Unique1010

时尚经典造型 别致线条设计  
Fashion Classic Style Chic Line Design

# Unique2000

时尚经典造型 别致线条设计  
Fashion Classic Style Chic Line Design

## ■ 技术参数 Technical parameters

材质: 铝合金	Material: Aluminium alloy
主板: 收发一体/3820/4900主板	Mainboard: MONO/330/4900
输入电压: 100-240V AC, 50-60Hz	Input: 100-240V AC, 50-60Hz
中心频率: 8.2Khz	Center Frequency: 8.2Khz
工作温度: 0°C-50°C	Working temperature: 0°C-50°C
相对湿度: 0%-90%	Relative humidity: 0%-90%
高度: 157cm	Height: 157cm
宽度: 44cm	Width: 44cm
厚度: 5cm	Thickness: 5cm
包装: 2支/箱, 15kg/箱	Packing: 2pcs/ctn, 15kg/ctn
1610*490*160mm/箱	1610*490*160mm/ctn

## ■ 产品特点 Product Features

- 1、采用高品质的铝合金材质, 外观经典大方;
- 2、具有灵敏度自动调节功能, 当遇到固定的干扰信号时, 它可以自动排除误报频率, 防止误报, 不会影响标签的正常使用;
- 3、发射控制开关选择, 当某一信号出现强干扰时, 可以选择关闭该路发射, 以减少误报现象;
- 4、软标签单边检测距离为60cm-70cm, 硬标签为70-90cm, 根据标签种类和现场环境而定。

1. Made of high-quality aluminum alloy material with classic appearance.
2. It can adjust detect sensitivity automatically based on local environment. When confronted with fixed interference signal, it can automatically exclude false frequency to prevent false alarm, will not affect the normal use of the label.
3. Transmit control switch selection, when some road signal appears strong interference, you can choose to turn off the road launch, to reduce false positives.
4. Detect distance of soft label is 60cm-70cm each side, hard tag is 70cm-90cm each side, accurate distance should depend on type of label/tag and local environment.



## ■ 技术参数 Technical parameters

材质: 亚克力	Material: Acrylic
主板: 收发一体/3820	Mainboard: MONO/3820
输入电压: 100-240V AC, 50-60Hz	Input: 100-240V AC, 50-60Hz
中心频率: 8.2Khz	Center Frequency: 8.2Khz
工作温度: 0°C-50°C	Working temperature: 0°C-50°C
相对湿度: 0%-90%	Relative humidity: 0%-90%
高度: 154cm	Height: 154cm
宽度: 41cm	Width: 41cm
厚度: 11cm	Thickness: 11cm
包装: 1支/箱, 23kg/箱	Packing: 1pcs/ctn, 23kg/ctn
1600*440*160 mm/箱	1600*440*160 mm/ctn

## ■ 产品特点 Product Features

- 1、时尚外观, 采用高品质的亚克力材质, 使商店风格更加时髦和现代化;
- 2、具有灵敏度自动调节功能, 当遇到固定的干扰信号时, 它可以自动排除误报频率, 防止误报, 不会影响标签的正常使用;
- 3、发射控制开关选择, 当某一信号出现强干扰时, 可以选择关闭该路发射, 以减少误报现象;
- 4、软标签单边检测距离为60cm-70cm, 硬标签为70-90cm, 根据标签种类和现场环境4而定。

1. Made of high-quality acrylic material with fashionable appearance, make store become more fashionable and modern.
2. It can adjust detect sensitivity automatically based on local environment. When confronted with fixed interference signal, it can automatically exclude false frequency to prevent false alarm, will not affect the normal use of the label.
3. Transmit control switch selection, when some road signal appears strong interference, you can choose to turn off the road launch, to reduce false positives.
4. Detect distance of soft label is 60cm-70cm each side, hard tag is 70cm-90cm each side, accurate distance should depend on type of label/tag and local environment.

